


# Alcad Apartment amplifiers

## Model : AI-131

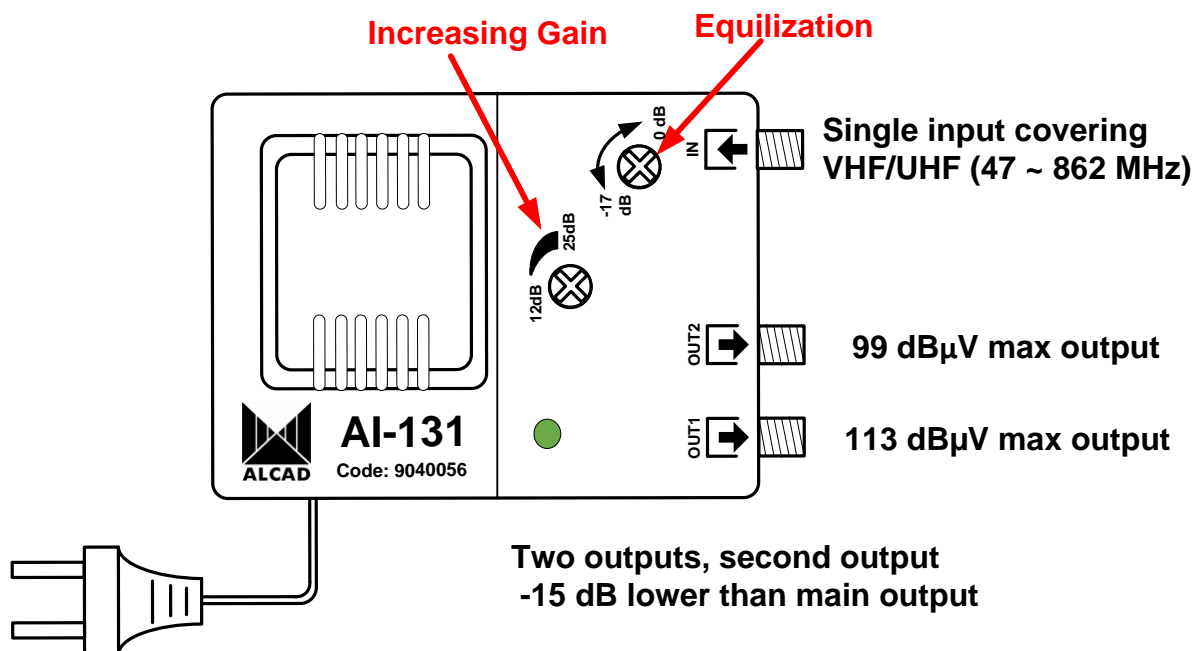

### Main features:

- Amplify the VHF/UHF band (47 to 862 MHz).
- Return Path 5-30 MHz, Gain -2.5 dB.
- Use to compensate for losses incurred due to long cable runs
- Or compensate for the losses of splitters used in feeding multiple TV points in the apartment.
- Two outputs, main output or secondary (-15 dB) output. Both outputs can be used if required.
- Separate adjustment for Gain and Equilization.
- Compact amplifier housing.

<b>Output 1:</b>	<b>VHF / UHF (47 ~ 862 MHz)</b>
Total Gain	24 dB
Adjustable gain	13 dB
Equilization	20 dB

<b>Output 2:</b>	<b>VHF / UHF (47 ~ 862 MHz)</b>
Total Gain	10 dB
Adjustable gain	13 dB
Equilization	20 dB