


Alcad Distribution amplifiers

Model : DA-520

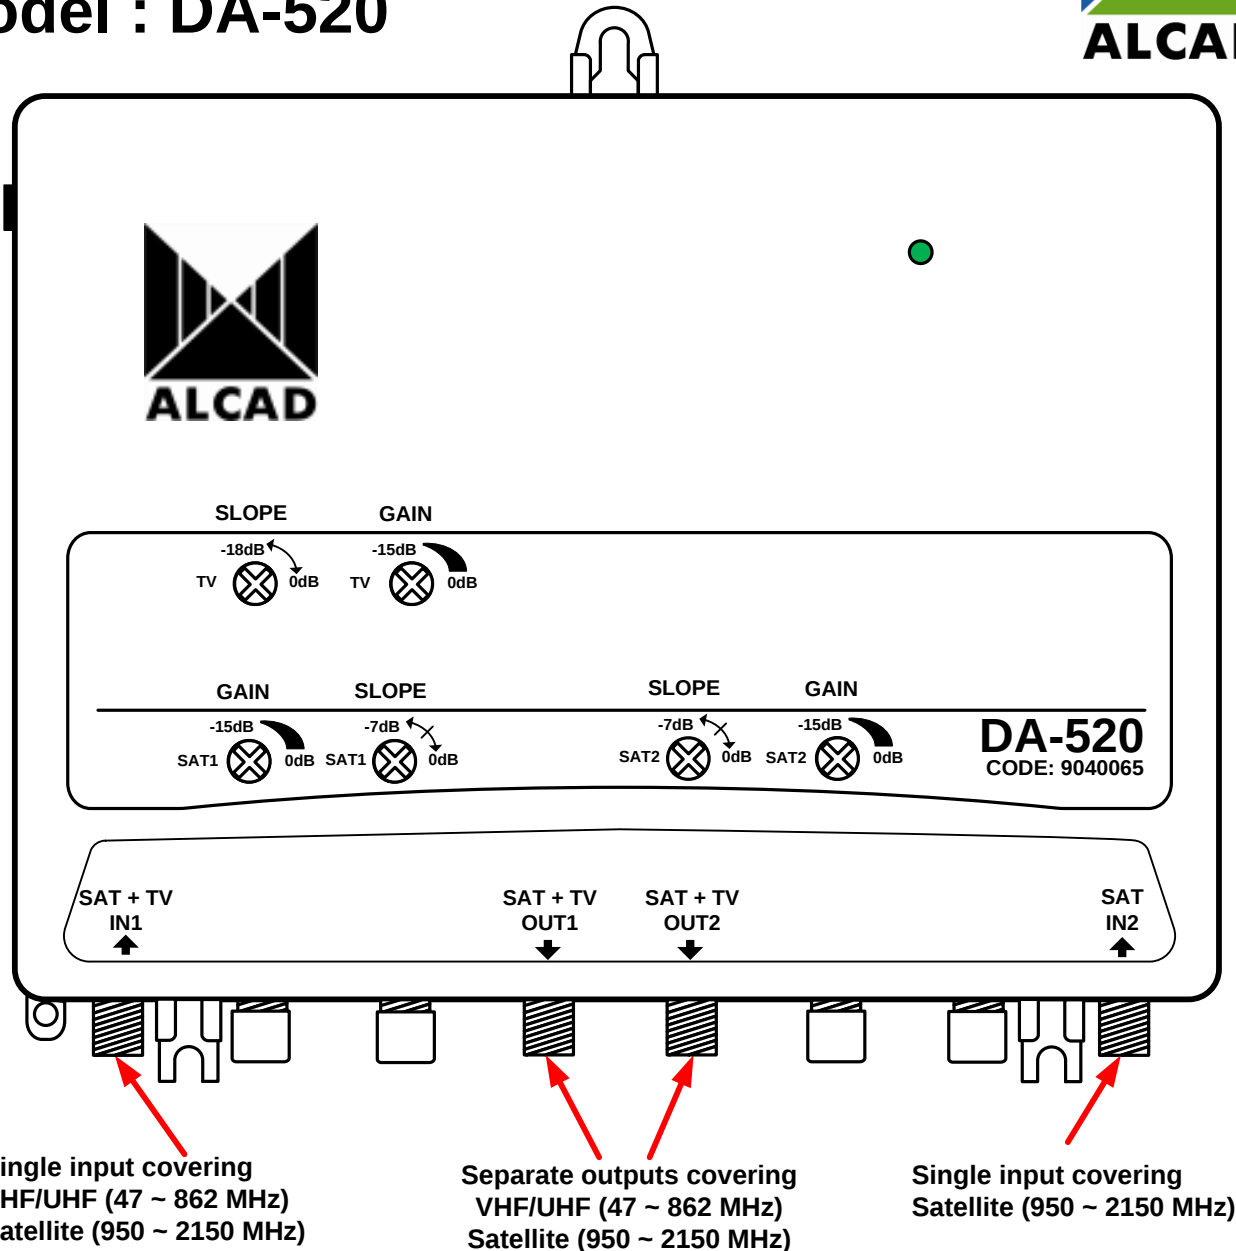

Main features:

- One input amplifies the TV (47 ~ 862 MHz) signal and Sat-IF (950 ~ 2150 MHz) while the other input amplifies the second Sat-IF (950 ~ 2150 MHz) only.
- The TV signal is distributed to both outputs as a common signal.
- Unit has individual gain and slope control for TV signal and separate gain and switchable slope for each Sat-IF signal.
- Maximum output 118 dBμV for TV and 118 dBμV for Satellite
- Use as a distribution amplifier in multi-level projects.
- Amplifier housing made from Zamak and galvanised plate for maximum shielding.

• Output 1:	VHF/UHF (47 ~ 862 MHz)	Sat (950 ~ 2150 MHz)
Total Gain	34 dB	42 dB
Adjustable gain	15 dB	15 dB
• Output 2:	VHF/UHF (47 ~ 862 MHz)	Sat (950 ~ 2150 MHz)
Total Gain	34 dB	42 dB
Adjustable gain	15 dB	15 dB